


Part No.	AL-513RGBW-C-002	Diff No.002
5 mm	Round	Type : LED Lamps

■ Package Dimension:

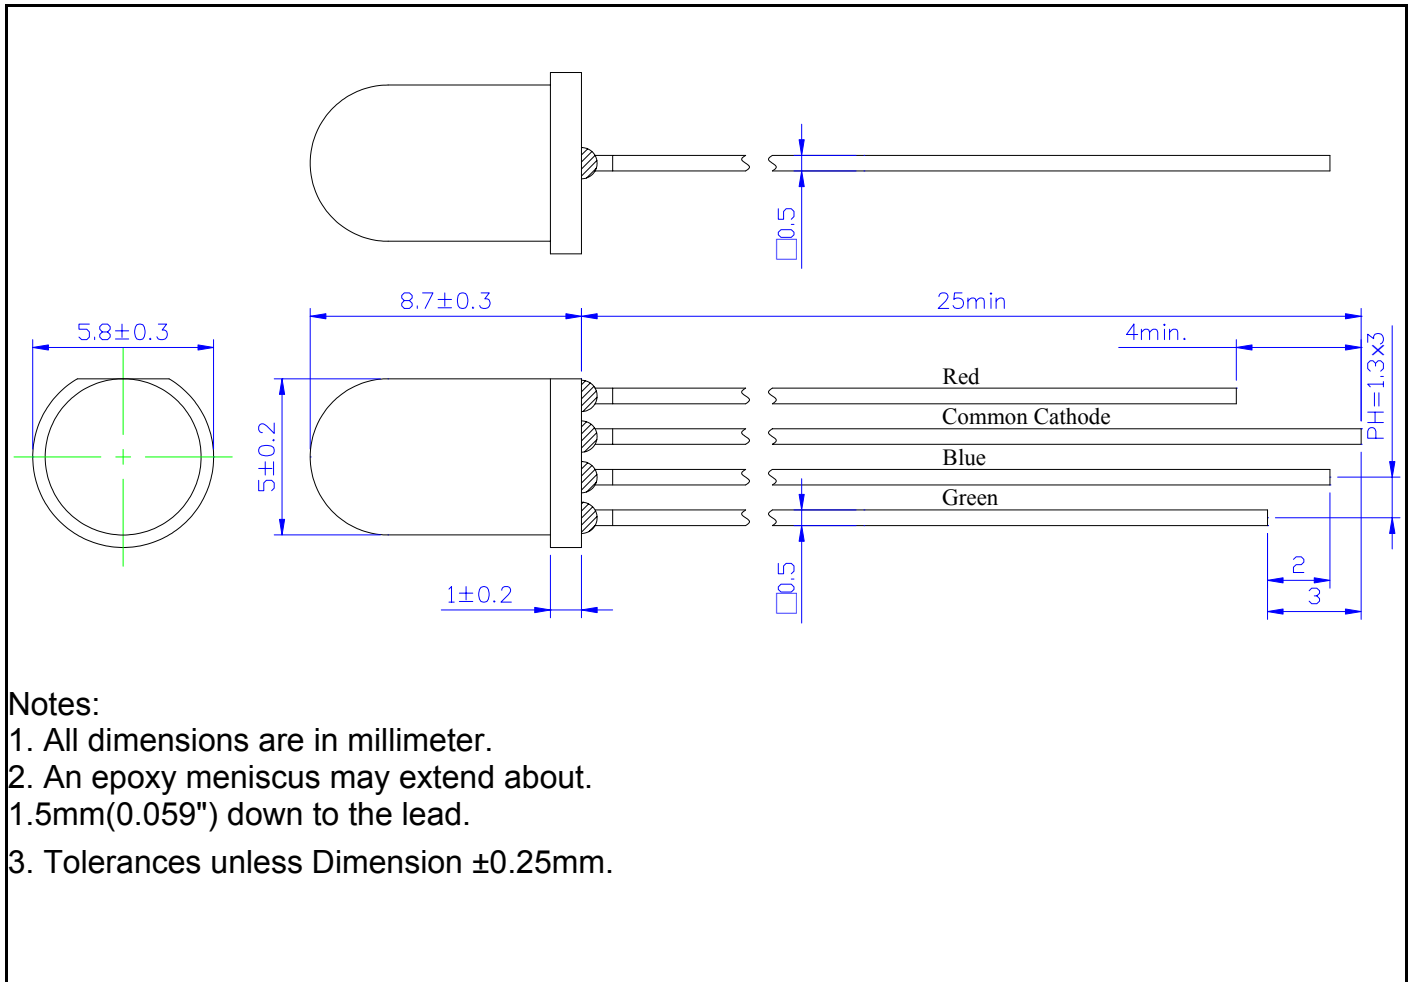

Notes:

1. All dimensions are in millimeter.
2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
3. Tolerances unless Dimension ± 0.25 mm.

■ Features :

- Choice of various viewing angles.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different color, intensities, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

Part No. **AL-513RGBW-C-002** Diff No.002

5 mm

Round

Type : LED Lamps

LED Parts P/N.	Chip		Lens Color
	Material	Emitted Color	
AL-513RGBW-C-002	AlGaInP	Super Red	White Diffused
	InGaN	Super Green	
	InGaN	Super Blue	

■ Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating			Unit
		Red	Green	Blue	
Continuous Forward Current	I _F	30	30	30	mA
Operating Temperature	T _{opr}	-40~+85	-20~+80		°C
Storage Temperature	T _{stg}	-40~+85	-30~+100		°C
Soldering Temperature	T _{sol}	260±5			°C
Electrostatic Discharge	ESD	1000			V
Power Dissipation	P _D	120			mW
Peak Forward Current (Duty 1/10@1KHz)	I _F (Peak)	100			mA
Reverse Voltage	V _R	5			V

Part No. **AL-513RGBW-C-002** Diff No.002

5 mm

Round

Type : LED Lamps

■ **Electronic Optical Characteristics :**

Parameter	Color	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Red	I_v	420	600	/	mcd	$I_F=20mA$
	Green		700	1000	/		
	Blue		140	200	/		
Viewing Angle	Red	$2\theta 1/2$	/	45	/	deg	---
	Green		/		/		
	Blue		/		/		
Peak Wavelength	Red	λ_p	/	630	/	nm	$I_F=20mA$
	Green		/	525	/		
	Blue		/	472	/		
Dominant Wavelength	Red	λ_d	/	625	/	nm	$I_F=20mA$
	Green		/	520	/		
	Blue		/	470	/		
Spectrum Radiation Bandwidth	Red	$\Delta\lambda$	/	20	/	nm	$I_F=20mA$
	Green		/	30	/		
	Blue		/	35	/		
Forward Voltage	Red	V_F	/	2.0	2.4	V	$I_F=20mA$
	Green		/	3.5	4.0		
	Blue		/	3.5	4.0		
Reverse Current	Red	I_R	/	/	10	μA	$V_R=5V$
	Green		/	/			
	Blue		/	/			

Part No. **AL-513RGBW-C-002** Diff No.002

5 mm

Round

Type : LED Lamps

■ Reliability test items and conditions :

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

NO	ITEM	Test Conditions	Test hours/cycle	Sample Q'ty	Ac/Re
1	Solder Heat	Temp : 260°C±5°C	5 sec	22 pcs	0/1
2	Temperature Cycle	H : +100°C 15min ∩ 5min L : -40°C 15min	50 cycles	22 pcs	0/1
3	Thermal Shock	H : +100°C 15min ∩ 10sec L : -10°C 15min	50 cycles	22 pcs	0/1
4	High Temperature Storage	Temp : 100°C	1000 hrs	22 pcs	0/1
5	Low Temperature Storage	Temp : -40°C	1000 hrs	22 pcs	0/1
6	DC Operating Life	I _F =20mA	1000 hrs	22 pcs	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 hrs	22 pcs	0/1

Part No. **AL-513RGBW-C-002**

Diff No.002


5 mm

Round


Type : LED Lamps

■ **Typical electro-optical characteristics curves :**


The data typical and the value are not guaranteed.

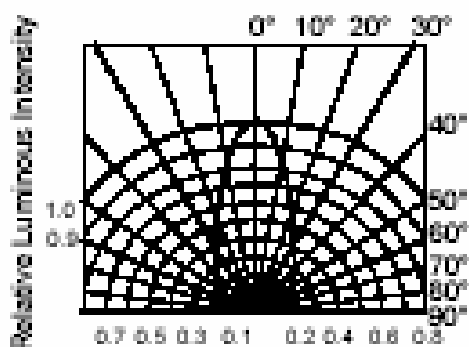


RADIATION DIAGRAM

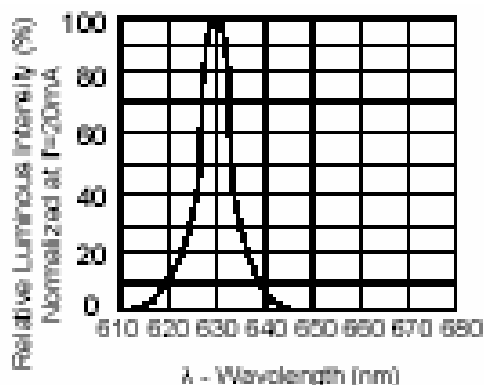


RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

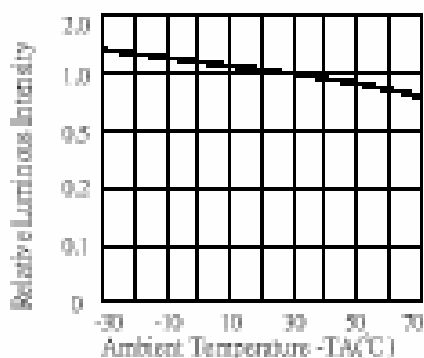


LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE

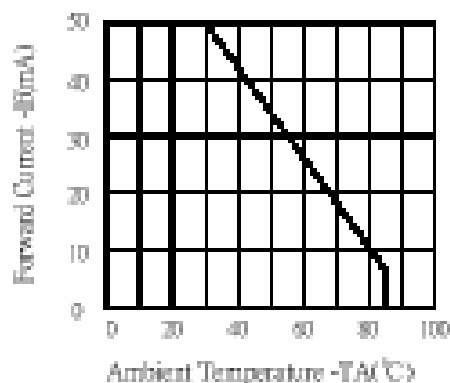

FORWARD CURRENT VS. AMBIENT TEMPERATURE

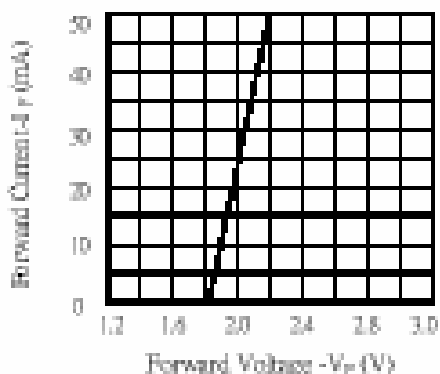

FORWARD CURRENT VS. FORWARD VOLTAGE

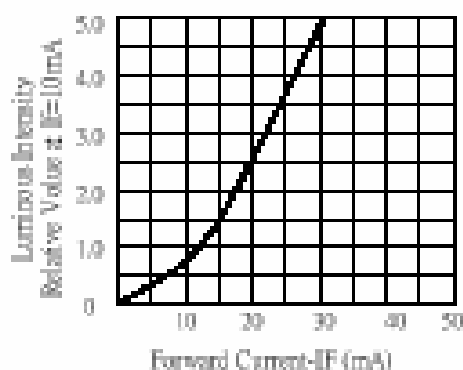

LUMINOUS INTENSITY VS. FORWARD CURRENT

(Red)

Part No. **AL-513RGBW-C-002**

Diff No.002


5 mm

Round


Type : LED Lamps

■ **Typical electro-optical characteristics curves :**


The data typical and the value are not guaranteed.

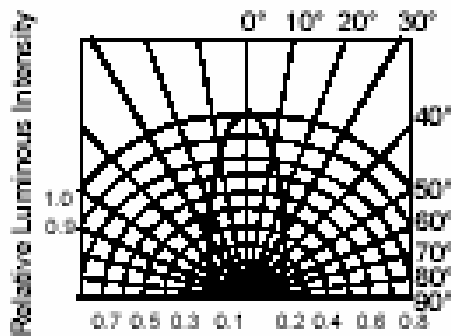


RADIATION DIAGRAM

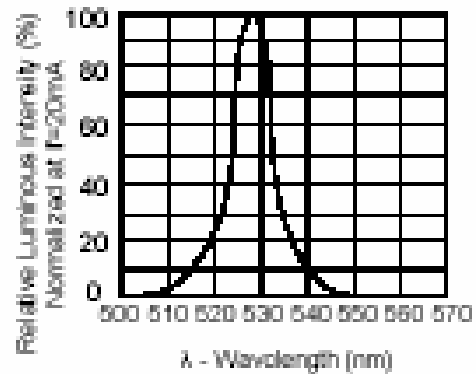


RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

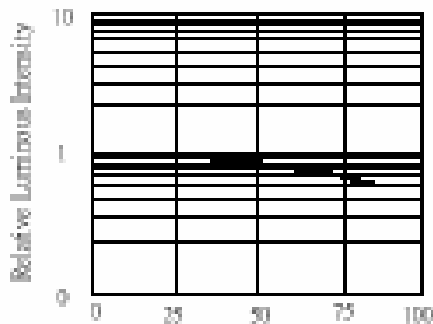


LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE

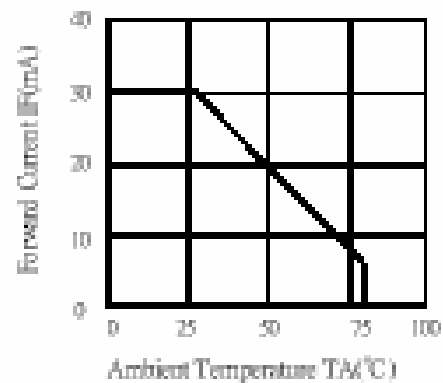

FORWARD CURRENT VS. AMBIENT TEMPERATURE

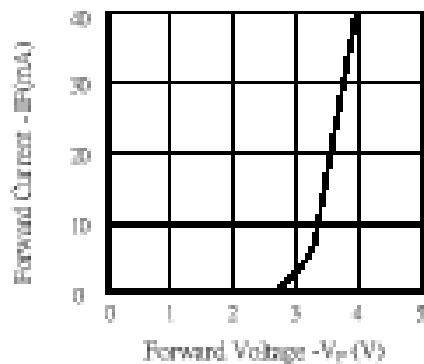

FORWARD CURRENT VS. FORWARD VOLTAGE

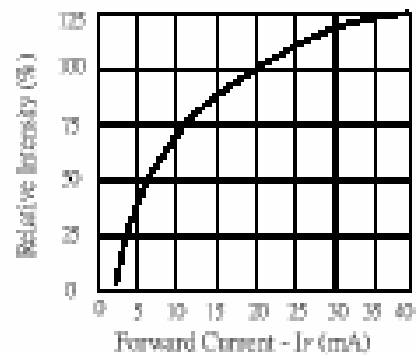

LUMINOUS INTENSITY VS. FORWARD CURRENT

(Green)

Part No. **AL-513RGBW-C-002**

Diff No.002


5 mm

Round


Type : LED Lamps

■ **Typical electro-optical characteristics curves :**


The data typical and the value are not guaranteed.

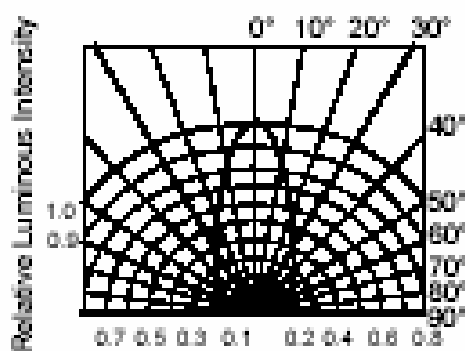


RADIATION DIAGRAM

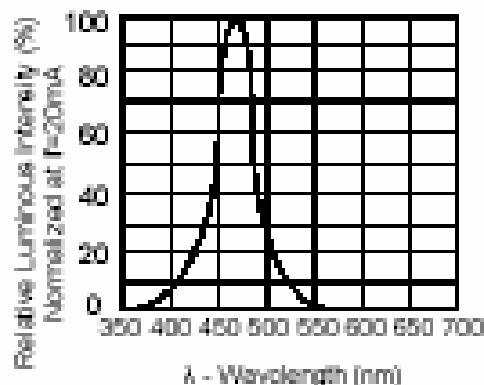


RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

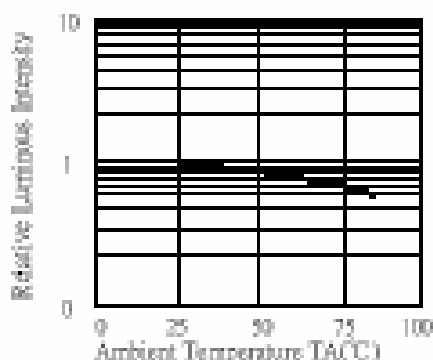


LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE

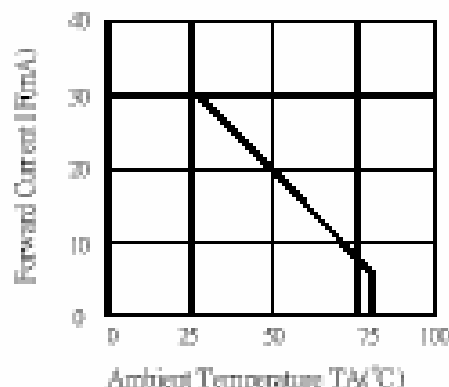

FORWARD CURRENT VS. AMBIENT TEMPERATURE

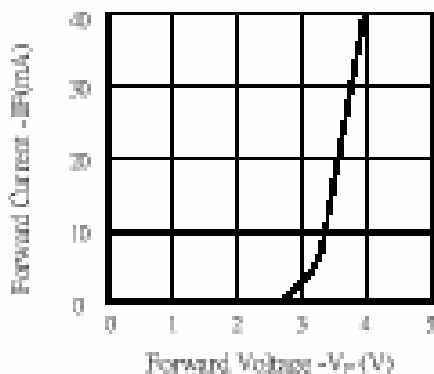

FORWARD CURRENT VS. FORWARD VOLTAGE

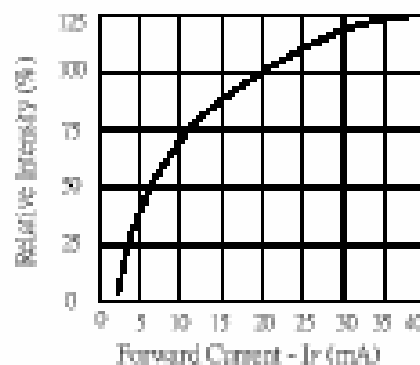

LUMINOUS INTENSITY VS. FORWARD CURRENT

(Blue)