


GH1609 - FRIDGE SLIDE DRAWER

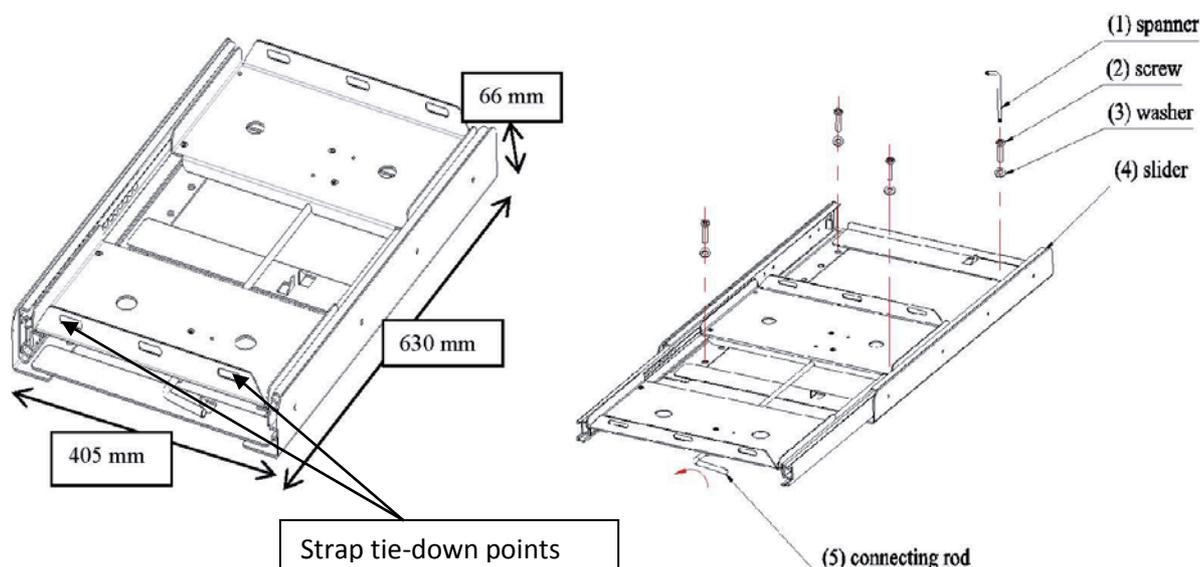

1-INSTALLATION INSTRUCTIONS

The slide drawer has to be secured by a minimum of 6 equally spaced points across the base frame. Depending on the surface that the slide is being attached to, it can be secured using self tapping screws or nuts and bolts through the predrilled holes located along the base frame. Install the fridge only once the slide is secured in position.

Steps:

- Place the slide in position where you want to install it with the release handle facing in the direction that the slide is to pull out from.
- Extend the slide slowly to expose the pre-drilled mounting holes, by rotating the release handle in an anti clockwise direction until fridge tray is released.
- Commence installing the fasteners starting from the rear and moving forward using the pre drilled holes.
- If the slide is not moving smoothly, loosen the fasteners slightly (it may happen, especially if the mounting surface is covered in a carpet material).
- When all fasteners are in place, slide installation is complete.

2-OPERATION

Once the slide drawer is fully installed as detailed above, the drawer can be extended by rotating the connecting rod and pulling the drawer outwards. There are two lock positions for the drawer; one at half extension, and one at full extension. The drawer will automatically lock into these positions once the connecting rod handle is released and the drawer is positioned accordingly.

3-FITTING THE FRIDGE

Ensure that the refrigerator is placed in the correct position on the drawer so that it fits into the positioning slots. Fix the fridge to the slide drawer securely, using the supplied tie down straps secured to the tie down points on the drawer. Check the straps are secured tightly.

Do not exceed the maximum loading of 100kg at half extension, 75kg full extension. This product is intended for use with Powertech Fridge models GH1600, GH1602, GH1604 only.