



4 Port HDMI UHD Splitter



AC-1768 User Manual

Box Contents

1 x 4 Port HDMI UHD Splitter

1 x 5V/1A DC Power Supply Adaptor


Operating Instructions

Connect the signal sources such as Blu-Ray Player, Play Station 3, satellite receivers and computers equipped with HDMI output interfaces with a short high-speed HDMI cable to the HDMI Splitter input.

Connect the HDMI outputs from the HDMI Splitter to high-definition display devices such as HD-LCD, HD-DLP and HD projectors with HDMI input interfaces. Use high-speed HDMI cables that are recommended for the distances that are required for each connection.

The Splitter is powered by an external power supply which is included. Connect power first to the source, then to the Splitter and then to each HD TV or projector.

Connection Diagram

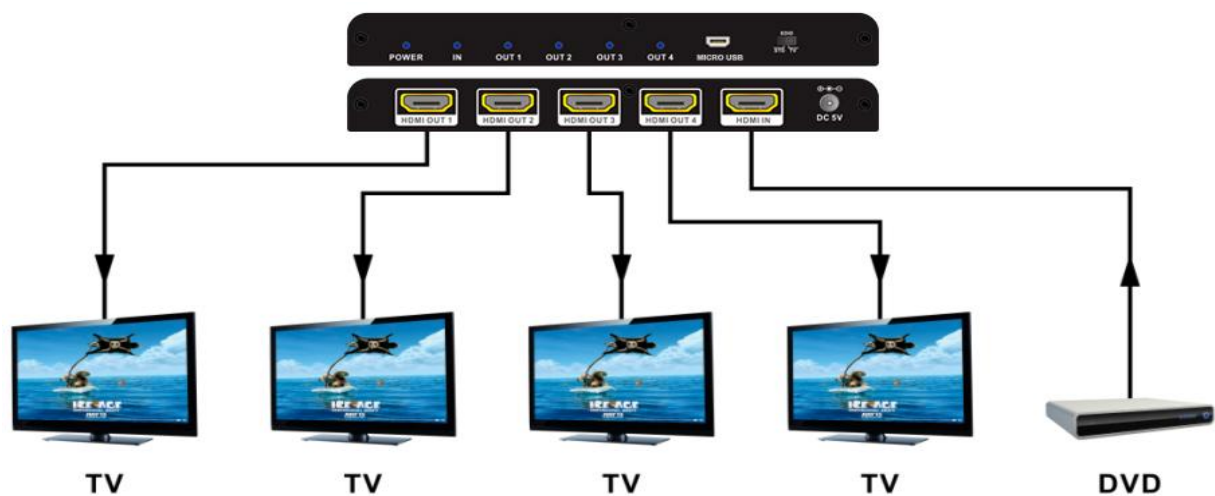


1. **POWER LED:** This blue LED illuminates when the device is connected with power supply.
2. **IN LED:** This blue LED illuminates when the Source connects to the device.
3. **OUT LED:** These blue LEDs will light up to indicate which HDMI outputs are connected to

an active TV/display/monitor.

4. **Micro USB:** Socket for micro USB connection.

5. **EDID STD:** When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio output at LPCM 2CH Stereo. Use this mode if there are display problems in TV Mode.

6. **EDID TV:** When in 'TV' mode, the unit will read the EDID settings of the display device connected to HDMI OUT 1. If it detects a 4K2K capable EDID setting it will transmit the signal in that format to all outputs. If no 4K2K capable EDID is detected then the unit will output the best resolution that all displays can support.

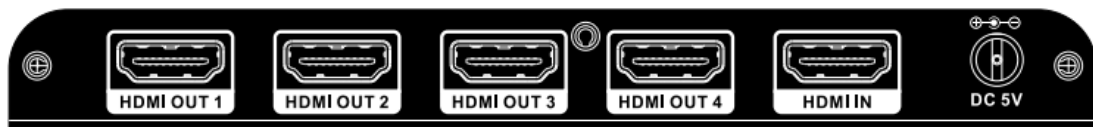

1. **HDMI OUT 1~4:** Connect each of the HDMI outputs to an HDMI display for simultaneous HDMI distribution, or cascade the output to another transmitter to extend the operating distance.

2. **HDMI IN:** Connect the input port to the HDMI or DVI output of your source device such as a DVD player or set-top box with an HDMI cable.

3. **DC 5V:** Plug the 5V DC power supply into the unit and connect the adaptor to an AC outlet.

Specification

Compatible with:	HDMI2.0, HDCP2.2 and DVI 1.0 standards
Video Bandwidth	300MHz/10.2 Gbps
Input Ports	1 x HDMI (Female type)
Output Ports	4 x HDMI (Female type)
Output Resolution	480i ~1080p50/60, 4Kx2K@24/30, 4k2k@60Hz with 12bit YCBCR 4:2:0,VGA~UXGA
ESD Protection	Human Body model: ±8 kV (air-gap discharge) ±4 kV (contact discharge)
Power Supply	5 V/1A DC
Dimensions	64 mm (W) × 155mm (D) × 17 mm (H)

Weight	180 g
Chassis Material	Metal
Silkscreen Color	Black
Operating Temperature	0 °C~40 °C/ 32 °F~104 °F
Storage Temperature	-20 °C ~ 60 °C/-4 °F ~140 °F
Relative Humidity	20~90 % RH (non-condensing)
Power Consumption	2W

Distributed by:

TechBrands by Electus Distribution Pty.Ltd.

NSW 2116 Australia

Ph: 1300 738 555

Int'l: +61 2 8832 3200

Fax: 1300 738 500

www.techbrands.com

Made in China