

**HDMI Over Mains Power
with IR
AR-1903
User Manual**

Thank you for purchasing this product. For optimum performance and safety, please read the instructions carefully and keep the manual for future reference.

IMPORTANT SAFETY NOTICE

Please read below safety instructions carefully before installation and operation:

1. Please pay attention to all the warnings and hints on this device.
2. Do not expose this unit to rain, moisture and liquid.
3. Do not put any stuff into the device.
4. Do not repair the device or open the enclosure without professional person guidance to avoid electronic shock.
5. Make sure good ventilation openings to avoid product overheating, causing damage.
6. Shut off power and make sure environment is safe before installation.
7. Do not plug-in/out the network cables and IR cables when it is in use to avoid cables damage.
8. Make sure the specification matched if using 3rd party DC adapters.

INTRODUCTION

This HDMI powerline extender applies the HDBiT transmission protocol and transmits audio and video signal over existing power line. It does not require any cabling. Under the same electric meter, it just needs to connect transmitter and receiver. Power them on and they can match automatically. Plug and play design gives users very convenient and portable connection.

FEATURES

1. It use powerline to transmit signal, and can be connected where there is outlet, eliminating the wiring of network cable or HDMI Cable.
2. Input voltage: AC 100~240V.
3. It can extends 1080P@60Hz signal up to 300M under the condition of fluent electric power environment.
4. It supports IR pass back.
5. Supports HDMI loop output from TX
6. Fireproof raw material is used to ensure safety and reliability.
7. Easy setup, plug and play.

INSTALLATION REQUIREMENT

1. HDMI source device (DVD, PS3, Set top box, PC etc).
2. HDMI display device like SDTV, HDTV, and projector with HDMI port.
3. AC 100~240V Power input.


PACKAGE CONTENTS



1 x HDMI Extender TX
Sender



1 x HDMI Extender RX
Receiver



1 x AC 100-240V
Powerline



1 x IR Blaster
Extension Cable





1 x IR Receiver Extension
Cable



1 x User Manual


PANEL DESCRIPTION

1. HDMI Extender TX Sender

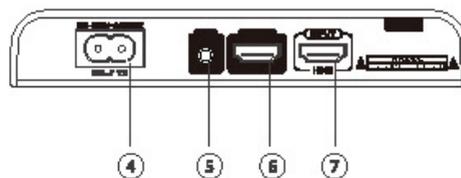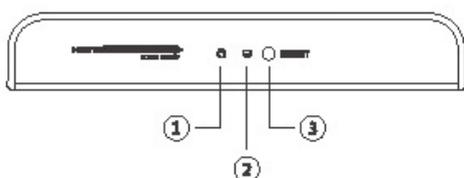


1	Data Transmission LED	LED Blinks slowly when it is connecting. LED blinks fast when it is successfully connected and transmitting data.
2	Connection LED	LED blinks to indicate a working circuit connection.
3	Reset	Press reset button to restart the device.
4	Power Input	Connect with AC100~240V power line.
5	IR Blaster Extension Cable Interface	Connect with IR blaster extension cable. Please put the IR blaster close to source device to best transmit the IR signal from receiver.
6	HDMI Output	Connect with HDMI display device.
7	HDMI Input	Connect with HDMI source device.

2. HDMI Extender RX Receiver

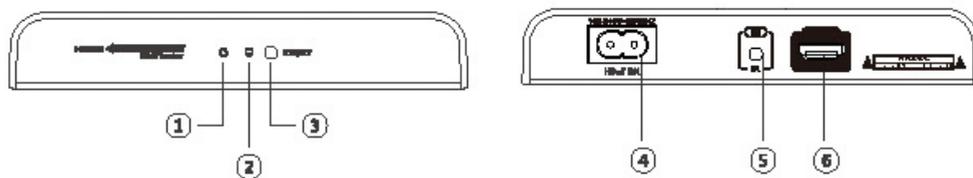

1	Data Transmission LED	LED Blinks slowly when it is connecting. LED blinks fast when it is successfully connected and transmitting data.
2	Connection LED	LED blinks to indicate a working circuit connection.
3	Reset	Press reset button to restart the device.
4	Power Input	Connect with AC100~240V power line.
5	IR receiver extension cable interface.	Connect with IR blaster extension cable. Please make sure the remote control is within the required range of IR receiver.
6	HDMI Output	Connect with HDMI display device.

CONNECTION

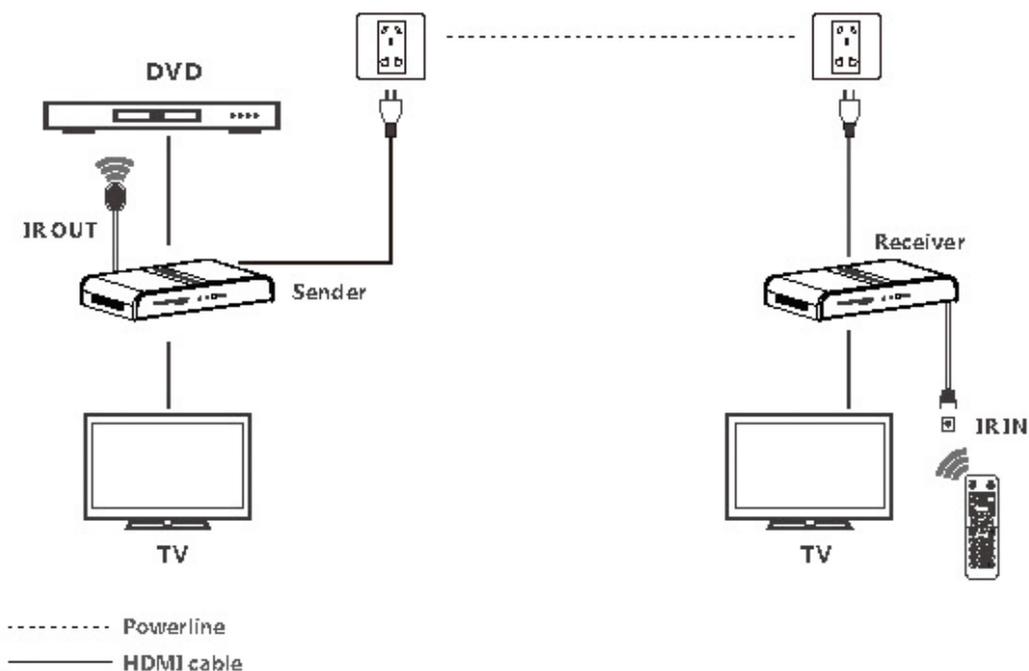

FAQ

Q: TV display “waiting for connection...” on the bottom right corner?

A: Please check if the power supply of TX (sender) is well connected and the power indicator led lights on.

Q: TV display “Please check the TX input signal”?

A:

- 1) Please check if there is an HDMI signal input of sender TX.
- 2) Try to connect the signal source directly to display device to see if there is signal output from source device or change the signal source, HDMI cables and try again.

Q: Display not fluent and stable?

- A:
- 1) Please check if the powerline is arranged smooth and If the powerline length is over the limitation of this product.
 - 2) Please check if the powerline capacity is over loaded
 - 3) Please check if there is electricity interruption equipment. And it is advised to plug in wall outlet and avoid using power charger and power adapter.

SPECIFICATIONS

Input voltage:	100-240VAC @ 50/60Hz
Power:	
Transmitter:	7.5W
Receiver:	7W
HDMI:	Compatible with HDCP
Supports:	480i @ 60Hz, 480p @ 60Hz, 576i @ 50Hz, 576p @ 50Hz, 720p @ 50/60Hz, 1080i @ 50/60Hz, 1080p @ 50/60Hz
Transmit Distance:	Up to 300m
IR Remote Extender:	Supports 20 - 60kHz
Weight:	
Transmitter:	330g
Receiver:	316g
Dimensions:	150(W) x 93(D) x 25(H)mm (Each)

DISCLAIMER

The product name and brand name may be registered trademark of related manufacturers. TM and ® may be omitted on the user manual. The pictures on the user manual are just for reference, and there may be some slight difference with the real products. We reserve the rights to make changes without further notice to a product or system described herein to improve reliability, function or design.

Distributed by:
TechBrands by Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere
NSW 2116 Australia

Ph: 1300 738 555
Int'l: +61 2 8832 3200
Fax: 1300 738 500

www.techbrands.com

Made in China