

Box Contents:



1 x 1080p 4-In-1 Vari-Focal Bullet Camera



1 x 18m Video & Power Cable




1 x Mains Power Adaptor




1 x Mounting Hardware

Mode Diagram:

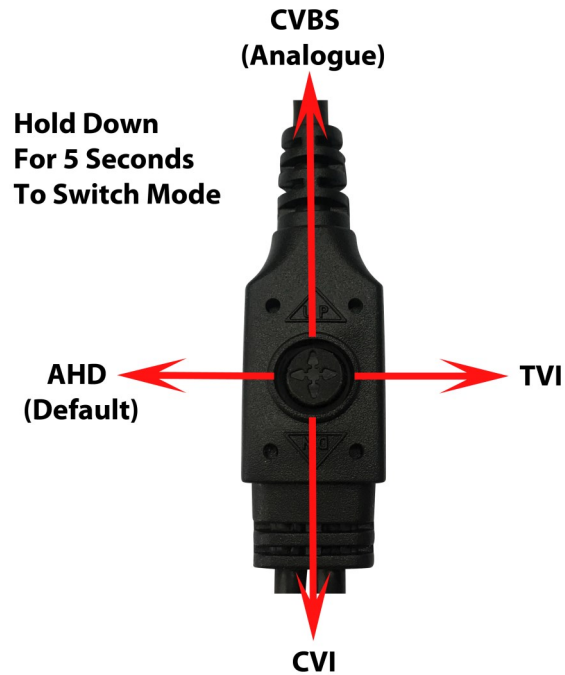

Connection Diagram:

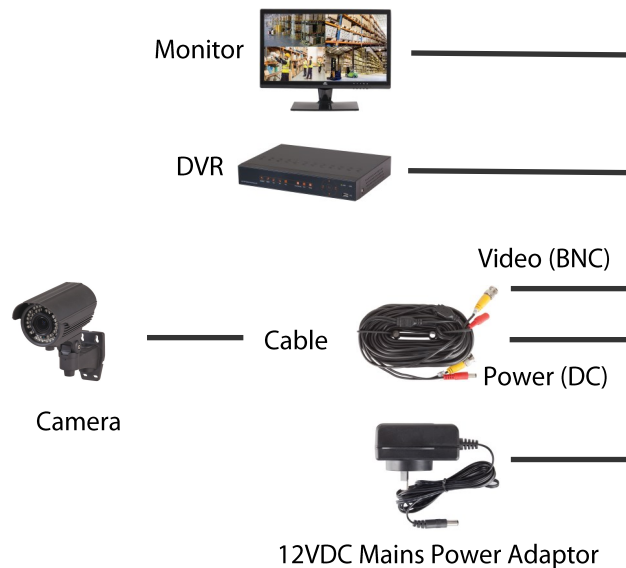

Troubleshooting:

Question: The picture will not display.

Answer: Check that the mains power adaptor and video cables have been connected properly to the camera, DVR and monitor.

Question: Interference is showing on the display.

Answer: Make sure the monitor and peripheral equipment used is not making it interfere. Also it may be caused by the power supply ripples.

Question: The colours continuously change.

Answer: This may be caused by an electromagnetic field or fluorescent lights. The camera may need to be distanced away from the lights to improve the quality of the image.

Question: The image displays smear lines.

Answer: The power supply voltage could be unstable or check that the cables are connected properly.

Safety:

1. Don't expose the camera to direct sunlight or bright objects as it may damage the lens.
2. To prevent electric shock, do not open the enclosure.
3. Avoid direct exposure to rain and water over long periods of time as it may limit the camera's lifespan.

Specifications:

Camera Type: AHD/TVI/CVI/CVBS(Analogue)

Image Sensor: 1/2.8" CMOS Sony® IMX323

Resolution: 1080p (1920 x 1080)

Megapixels: 2.0

Frame Rate: 25fps

Lens: 2.8-12mm

Lens Angle: 32°-104°

Infrared: 42 x IR LEDs

Infrared Range: Up to 30m

Min Illumination: 0.1 Lux (IR On)

IP Rating: IP66

Power: 12VDC, 1A

Power Consumption: 70mA

Dimensions:

206(L) x 177(H) x 85(W)mm

(Including Bracket)

Distributed by:
TechBrands by Electus Distribution Pty.
Ltd.
320 Victoria Rd, Rydalmere
NSW 2116 Australia
Ph: 1300 738 555
Int'l: +61 2 8832 3200
Fax: 1300 738 500
www.techbrands.com



1080p 4-In-1 Vari-Focal Bullet Camera



User Manual
QC-8672